



RESISTANCE AND TEMPERATURE MEASUREMENT WHERE PRECISION MATTERS



 **CROPICO**

WORLD LEADER IN PRECISION INSTRUMENTS

Contents

01-05 Introduction

Resistance Testers

06-07 DO4A

08-09 DO6

10-11 DO4000 Series

12-13 DO5000 Series

14-15 DO7Plus

16-17 DO7

18-19 DO7E

20-21 DO7010

22-23 DO8000

24-25 MTS

26 DO5000-CS

27 Cable Clamps

Temperature Measurement

28-29 3000 series

31 Pt100S/1 and Pt100S/2

32-33 DP6

Resistance Decades & Standards

34-35 005/6/8

36-37 RBB

38-39 RBC

40-41 RH9A Series

42 RM6

43 RM6N

44 RM8

45 CM5-N

46-47 RS3

48 CR

Seaward Group

A PRECISE MEASUREMENT IS A VALUABLE PIECE OF INFORMATION. AN IMPRECISE MEASUREMENT ISN'T.

We produce a wide range of high quality measuring instruments and standards and have done for over 50 years.

Our range of products covers all aspects of resistance and temperature measurement. Our resistance meters range from hand-held micro ohmmeters to transformer winding resistance meters. We pride ourselves on accuracy and reliability of measurement with our entry level model having 10 micro ohm resolution.

We offer a wide range of micro ohmmeters so we can provide the best instrument for your resistance measurement needs.

To compliment our range of units we also have all the accessories you could ever need, these range from cable clamps with built-in water baths to a calibration resistor.

We also have an industry leading range of thermometers, these units are upgradeable to take up to 8 extra channels, giving 10 input channels, this makes our units ideal for use in medical autoclaves where 9 channels are required for measuring, with one channel for reference. Our thermometers offer accuracy of 0.01°C, with a resolution of 0.001°C. We also offer the ability to mix and match between PT25, PT100 and thermocouples, these features make this range of units unchallenged in the industry.

Cropico also have a range of Resistance Decade boxes and Resistance standards. We have Resistance Decade boxes covering ranges from 0.001 ohm to 1 tera ohm. Some of the high accuracy decade boxes are suitable for PT100 simulation. Our Resistance standards are among the most stable in the world, having typical stability of 0.001% over the year, this is achieved by using only the best and most carefully selected components.

We also believe that flexibility is key to customer satisfaction, therefore, if you want special jigs, fixtures or cables please let one of our dedicated staff know and we will be able to work out a solution.



RESISTANCE MEASUREMENT

Cropico specialise in low resistance measurement and offer a variety of ohmmeters to cover the various applications and customer circumstances. Typical applications are listed on the next page.

Some applications and testing standards require special leads and jigs for connecting to the sample under test. We offer a wide range of connecting leads, and have a number of standard jigs available. We will always be happy to supply special jigs if required, all we need is the drawing, a description of the application, or a sample of the item to be measured.

These application notes are intended to explain good measurement practice and highlight some of the more common sources of error.

Four Terminal Measurement

When measuring resistance below 100 ohm it is advisable to use a four wire measurement technique, this is often referred to as a Kelvin or Thomson configuration. By using this type of measurement configuration the connecting lead resistance is not included in the measurement, and the need for lead balancing and nulling is eliminated.

The measuring current is passed through the unknown resistance RX using the C1 and C2 leads. The placing of these leads is not critical but should always be outside the P1 and P2 leads. The Volt drop across the RX is measured across P1 and P2 and these should be placed at exactly the points to be measured. The measuring current is simultaneously passed through an internal reference standard in the ohmmeter and the

volt drop across RX is compared with the volt drop across this internal standard. From the ratio of these two volt drops the resistance value of RX is calculated and displayed. Because the same current is passed through both the standard and the RX and the ratio is calculated, the current does not need to be a precise value, all that is required is that the current is stable for the period during which each measurement is made, typically 0.5 seconds.

The most common cause of errors when making low resistance measurement is due to poor or inappropriate connection of the RX. Connections should be clean, mechanically firm and free from oxides which can cause an insulating effect.

Measuring Current

It is a misconception by a lot of customers that they must have a high measuring current, the higher the better they believe. This was true of the older digital instruments and their predecessor, the Kelvin Bridge. High currents were needed to realise sufficient volts across the RX for measurement.

For example $RX = 0.001\Omega$

Measuring Current	Volt Drop	Voltage Measurement Required for Resolution of 1Ω
1 Amp	1mV	1 V
10 Amp	10mV	10 V
100 Amp	100mV	100 V

With today's measuring components and techniques we are able to reliably and consistently measure these low voltages and make reliable and accurate measurements at the low currents. The disadvantages of using high currents

are; added cost, added weight to instrument, increased size of instrument and less measuring time when batteries are used. Test current heats up the RX and changes its value, and possible introduction of thermal E.M.F's which will affect the reading accuracy.

There are however, some applications where Test Specifications demand higher measuring currents and there is an argument that says a higher test current also tests the mechanical integrity of joints, i.e. if only a strand of wire is making the connection a high test current would burn away this strand. We believe there are better and more reliable ways of testing a joint's mechanical integrity.

Possible Measurement Errors

Poor Connection:

Most causes of measurement error can be traced back to poor or inconsistent connection to the object under test. In many cases it is desirable, if not essential, to make a jig to suit the particular component, this ensures that the P1 P2 connections are always made at the same point on the sample. We offer a variety of jigs and test leads, detailed in the product accessory sections.

Thermal E.M.F:

Another source of error can be thermal E.M.F. When two dissimilar metals are joined together an E.M.F. can be generated (thermocouple effect). Most ohmmeters use a dc measuring system to ensure true resistance, and not impedance, is measured. If the RX is also generating an E.M.F. it is obvious that this will add or subtract to the E.M.F. measured at the P1 P2 connections. This is overcome by making two measurements and reversing the current C1 C2 connections on the second measurement. The two readings are averaged to give the correct answer; $RX = (R1 + R2)/2$.

Most of the Cropico ohmmeters have the ability to select forward or reverse measurement current and to automatically average the two readings thus displaying the correct value.

Simple precautions should also be taken when making connections. The material used should be carefully selected, for example Nickel Plated Brass connecting clips can cause very large thermal E.M.F.'s to be generated when connected to copper wires. For best results unplated copper or brass leads and fittings should be used.

Typical Applications

There are many reasons why resistance of material is measured, and here are a few:

■ Manufacturers of components such as resistors, inductors and chokes all have to verify that their product meets the specified resistance tolerance, end of production line and quality control testing.

■ Manufacturers of switches, relays and connectors all need to verify that the contact resistance is below pre specified limits, end of production line testing and quality control.

■ Cable manufacturers must measure the resistance of the copper wires they produce. Resistance too high means that the current carrying capability of the cable is reduced, resistance too low means that the manufacturer is being too generous on the cable diameter using more copper than he needs to, this can be very expensive.

■ Installation and maintenance of power cables, switchgear and voltage tap changers require the cable joints and switch contacts to be of the lowest possible resistance thus avoiding the joint or contact becoming excessively hot. A poor cable joint or switch contact will soon fail due to this heating effect. Routine preventative maintenance with regular resistance checks ensures the best possible life performances.

■ Electric Motor and Generator manufacturers need to determine the maximum temperature reached under full load. To determine this temperature, the temperature coefficient of the copper winding is used. The resistance is first measured with the motor / generator cold i.e. at ambient temperature, the

unit is then run at full load for a specified period and then the resistance measured again from the change in resistance value, so the internal motor / generator temperature can be determined. Our ohmmeters are also used to measure the individual coils of a motor winding to ensure there are no short or open circuit turns and that each coil is balanced.

■ Those in the Automotive Industry need to measure the resistance of Robot Welding Cables to ensure that the weld quality does not deteriorate. Cropico products can also be used to measure battery lead crimp connectors, air bag detonator resistance, resistance of wiring harnesses and quality of crimp connectors on components.

■ Fuse manufacturers need to measure resistance for quality control.

■ Resistance bonding measurements on aircraft and military vehicles must be measured. It is necessary to ensure that all equipment installed in aircraft is electrically connected to the air frame, this includes galley equipment. Tanks and other military vehicles have the same requirements. Producers and users of large electrical currents all need to measure distribution joint resistance, bus bars and connectors to electrodes for electroplating.

■ Railway utilities including trams and underground railways (Metro) use the equipment for the measurement of power distribution cable joints. The resistance of rail track joints also needs measuring as the rails are often used for signalling information.

PRODUCT COMPARISON TABLE FOR RESISTANCE MEASUREMENT

	4000	4001	4002	D04A	D06	D07e	D07	D07Plus	D07010	D08000	D05000	D05001	D05002
Ranges	40mΩ to 4kΩ	40mΩ to 4kΩ	4mΩ to 400Ω	40mΩ to 4kΩ	20mΩ to 200kΩ	6mΩ to 600Ω	600μΩ to 60Ω	6mΩ to 6KΩ	6mΩ to 6Ω	2mΩ to 2kΩ	3mΩ to 30kΩ	3mΩ to 30kΩ	200mΩ to 30kΩ
Resolution	10μΩ	10μΩ	1μΩ	10μΩ	1μΩ	1μΩ	0.1μΩ	0.1μΩ	1μΩ	0.1μΩ	0.1μΩ	0.1μΩ	10μΩ
Accuracy	0.1%	0.1%	0.1%	0.1%	-	0.25%	0.25%	0.05%	0.2%	-	0.03%	0.03%	0.03%
Man/Auto Range	Yes	Yes	Yes	-	Yes	Yes	-	Yes	Yes	Yes	Yes	Yes	Yes
Measuring Current	1mA to 100mA	1mA to 100mA	1mA to 1A	1mA to 100mA	9μA to 900mA	1mA to 10A	1mA to 10A	100mA to 10A	100mA to 10A	10mA to 10A	10μA to 10A programmable	10μA to 10A programmable	10μA to 100mA programmable
Auto Average	Yes	Yes	Yes	-	-	Yes	Yes	Yes	Yes	-	Yes	Yes	Yes
Mains/Battery	Battery Rechargeable Option	Battery Rechargeable Option	Battery Rechargeable Option	Mains/Batt	Mains	Mains/Batt	Mains/Batt	Mains/Batt	Rechargeable Battery	Mains	Mains	Mains/Bat	Mains
Input Protection	415V rms	415V rms	415V rms	415V rms	45V rms	415V rms	415V rms	EN61010-1: 2001 cat 3	45V rms	Suitable for transformer measurements	415V rms	415V rms	415V rms
Temp Compensation	-	Yes	-	-	Yes	-	-	Yes	-	-	Yes	Yes	Yes
Hi/Low Limits	-	-	-	-	Yes	-	-	Yes	Yes	-	Yes	Yes	Yes
Data Logging	-	-	-	-	-	-	-	Yes	Yes	-	Yes	Yes	Yes
Interfaces	-	-	-	-	RS232	-	RS232	RS232/USB	RS232	RS232/USB	RS232 / IEEE488 / PLC	RS232 / IEEE488 / PLC	RS232 / IEEE488 / PLC
Fast Measure Mode	-	-	-	-	-	-	-	-	-	-	50 meas. / s	50 meas. / s	50 meas. / s

INDUSTRY COMPARISON TABLE FOR RESISTANCE MEASUREMENT

Ohmmeter	Automotive	Aerospace	Cable	Calibration Labs	Drivers and electrical machines	Distribution catalogues	Military	Manufacturing	Utilities; electrical, water and gas
	Manufacturers of vehicles and components - motors, alternators, connectors, cable harnesses, switches	Bonding resistance (metallization) of aircraft frames and all equipment	Measurement of cable resistance	Calibration standards	Measurement of motor, generator and transformer resistance		Army, Navy, Air force, bonding resistance of vehicles and equipment. Calibration of equipment	Resistance measurement of components, switches, connectors, crimp joints, fuses etc	Measurement of power cable joints, underground and pylon. Measurement of earthing resistance and contactor resistance in substations
D04000 Series	■	■				■	■	■	■
D04A		■			■		■	■	■
D05000 Series	■		■	■	■		■	■	
D06	■		■					■	
D07	■	■			■	■	■		■
D07e	■	■				■	■		■
D07Plus	■	■	■		■	■	■	■	■
D07010	■	■					■	■	■
D08000					■				■

DO4A SPECIFICATIONS

Range	Resolution	Typical Current	Accuracy @ 20°C ±5°C 1 year	Temperature Coefficient/°C
4kΩ	1Ω	100A	±(0.05% Rdg +0.02% FS)	30ppm Rdg + 1ppm FS
400Ω	100mΩ	1mA	± (0.05% Rdg +0.02% FS)	30ppm Rdg + 1ppm FS
40Ω	10mΩ	10mA	± (0.05% Rdg +0.02% FS)	30ppm Rdg + 1ppm FS
4Ω	1mΩ	10mA	± (0.05% Rdg +0.03% FS)	30ppm Rdg + 4ppm FS
400mΩ	100μΩ	10mA	± (0.05% Rdg +0.05% FS)	30ppm Rdg + 25ppm FS
40mΩ	10μΩ	100mA	± (0.05% Rdg +0.05% FS)	30ppm Rdg + 25ppm FS

Measurement

4 terminal Kelvin/Thomson principle eliminates errors due to lead resistance

Display

15mm LCD 4000 count with automatic decimal point and polarity indication

Ranges

6 push button selected with LED indication

Terminals

4mm binding posts accept spade tags and 4mm banana plugs

Working Temperature

0°C to +40°C re. humidity 80% max. non-condensing

Storage Temperature

-20°C to +50°C

Mains Supply

100/120/220/240V +10% to 13%
47Hz to 63Hz 20VA

Safety

EN 61010-1 EMC-EN 61236

Dimensions

15mm x 250mm x 88mm (W H D) approx
1/2 19" rack 2U high
467mm x 374mm x 216mm packed in carton

Mass

3.5kg approx. 4.5kg packed in carton

Auto Zero

Permits the automatic zero of amplifiers and external circuits, eliminating errors due to thermal E.M.F.

Protection

415 Vrms maximum at the measuring terminals will blow internal protection fuse

Calibration

Digital security key protected

Battery

6V 2.8Ah sealed lead acid battery with built-in charger. 14 hour typical operating time on lowest range, 28 hours typical on other ranges. Internal charger and automatic switch off

CODE ▾	ITEM ▾	DO4A OPTIONS
C02	1 metre cable clamp with metal base for the precise measurement of 1 metre cable samples 0.1...100mm ²	
C02A	1 metre cable clamp with metal base for the precise measurement of 1 metre cable samples 1...1000mm ²	
C03	1 metre cable clamp with water bath for the precise measurement of 1 metre cable samples 1...1000mm ²	
CB01	Carrying bag	
HS01	Duplex handspikes with 3 metre lead length	
HS02	Duplex handspikes with 3 and 15 metre lead length	
LS03	Lead set with 2 x 3 metre leads terminated in large Kelvin clips type KC3	
LS04	Lead set with 3 metre and 15 metre lead length terminated in large Kelvin clips type KC3	
LS05	Lead set with 4 x 1 metre leads terminated in banana plugs, 4 x crocodile clips, 4 x test probes and 2 x Kelvin clips type KC1	
LS06	Lead set with 1 metre leads terminated in miniature Kelvin clips type KC2	
MTS2	Calibration standard	

DO6 SPECIFICATIONS

Measurement Range*	Resolution	Measurement Current
*2.0000mΩ	100nΩ	3A
20.000mΩ	1μΩ	1A
200.00mΩ	10μΩ	100mA
2.0000Ω	100μΩ	10mA
20.000Ω	1mΩ	10mA
200.00Ω	10mΩ	1mA
2.0000kΩ	100mΩ	1mA
20.000kΩ	1Ω	100μA
200.00kΩ	10Ω	10μA

*Measuring range 2.0000mΩ / 3A option specify at time of order

Measurement

4 Terminal Kelvin/Thomson, eliminating lead resistance errors

Display

High-contrast graphic LCD with adjustable contrast and LED background illumination 264x64 Dots, 127 x 34 mm

Ranges

8 ranges manual selection with up/down keys, automatic selection with autorange function

Auto Zero

Permits the automatic zero of amplifiers and external circuits

Temperature Compensation

Automatic temperature compensation: 7 different temperature coefficients can be chosen and additional 8 TC's are adjustable

Relay Output

For the pre-selected upper and lower limit values "Too small", "Correct", "Too large"

Contact load = 30W max 48V 1 Amp

Dry Circuit Measurement

In accordance with DIN 41640 part 4 and IEC – 132-1

Open circuit voltage limited to 18mV

Interface

Interface RS232 and USB

Terminals

4mm safety sockets

Working Temperature

0°C to 50°C rel. humidity 90% max. non-condensing

Storage Temperature

Storage Temperature 0 ... + 70 °C

Mains Supply

Mains supply 85 ... 264 V AC 50/60 Hz

Safety

IEC 1010 Protective Class 1

Dimensions

Dimensions 247mm x 106mm x 275mm (W D H)

Mass

5kg approximately

CODE ▾	ITEM ▾	DO6 OPTIONS
C02		1 metre cable clamp with metal base for the precise measurement of 1 metre cable samples 0.1...100mm ²
C02A		1 metre cable clamp with metal base for the precise measurement of 1 metre cable samples 1...1000mm ²
C03		1 metre cable clamp with water bath for the precise measurement of 1 metre cable samples 1...1000mm ²
HS01-P		Duplex handspikes with 3 metre lead length
HS02-P		Duplex handspikes with 3 and 15 metre lead length
LS03-P		Lead set with 3 metre leads and terminated with large Kelvin clips type KC3
LS04-P		Lead set with 3 metres and 15 metres lead length terminated in large Kelvin clips type KC3
LS05		Lead set with 4 x 1 metre leads terminated with banana plugs, 4 x Crocodile clips, 4 x test probes and 2 x Kelvin clips type KC1
LS06-P		Lead set with 1 metre leads terminated in miniature Kelvin clips type KC2
PT02-DO6		Temperature probe with 2 metre lead length
RSL-03		RS232 Cable

DO4000/DO4001 SPECIFICATIONS

Range	Resolution	Typical Current	Accuracy @ 20°C ±5°C 1 year	Temperature Coefficient/°C
4kΩ	1Ω	100μA	±(0.05% Rdg +0.02% FS)	30ppm Rdg + 1ppm FS
400Ω	100mΩ	1mA	± (0.05% Rdg +0.02% FS)	30ppm Rdg + 1ppm FS
40Ω	10mΩ	10mA	± (0.05% Rdg +0.02% FS)	30ppm Rdg + 1ppm FS
4Ω	1mΩ	10mA	± (0.05% Rdg +0.03% FS)	30ppm Rdg + 4ppm FS
400mΩ	100μΩ	10mA	± (0.05% Rdg +0.05% FS)	30ppm Rdg + 25ppm FS
40mΩ	10μΩ	100mA	± (0.05% Rdg +0.1% FS)	30ppm Rdg + 25ppm FS

DO4002 SPECIFICATIONS

Range	Resolution	Typical Current	Accuracy @ 20°C ±5°C 1 year	Temperature Coefficient/°C
400Ω	100Ω	1mA	±(0.05% Rdg +0.02% FS)	30ppm Rdg + 1ppm FS
40Ω	10mΩ	10mA	± (0.05% Rdg +0.02% FS)	30ppm Rdg + 1ppm FS
4Ω	1mΩ	100mA	± (0.05% Rdg +0.02% FS)	30ppm Rdg + 1ppm FS
400mΩ	100μΩ	1A	± (0.05% Rdg +0.03% FS)	30ppm Rdg + 4ppm FS
40mΩ	10μΩ	1A	± (0.05% Rdg +0.05% FS)	30ppm Rdg + 25ppm FS
4mΩ	1μΩ	1A	± (0.05% Rdg +0.1% FS)	30ppm Rdg + 25ppm FS

Measurement

4 terminal Kelvin/Thomson principle eliminates errors due to lead resistance

Display

15mm LCD 4000 count with automatic decimal point and polarity indication

Ranges

6 automatic or manual selection with LED indication

Terminals

4mm safety sockets

Working Temperature

0°C to +40°C rel. humidity 80% max. non-condensing

Storage Temperature

-20°C to +50°C

Safety

EN 61010-1 EMC-EN 61236

Dimensions

215mm x 130mm x 55mm (W H D) approx
467mm x 374mm x 216mm packed in carton

Mass

0.8kg approx

Zero

Button to null measurement offsets

Protection

415 Vrms maximum at the measuring terminals will blow internal protection fuse

Calibration

Digital security code protected

Battery

Removable pack with 5 1.5V non-rechargeable batteries. Separate rechargeable pack, charger and docking station as optional extras

CODE	ITEM	DO4000 SERIES OPTIONS
4000-01	Rechargeable battery pack includes battery cassette with rechargeable batteries. Docking station also acts as bench stand and charger	
4000-02	Replaceable battery holder with non-rechargeable batteries	
4000-03	Replaceable battery holder with rechargeable batteries	
CB02	Carrying bag with shoulder strap and lead pouch that has a clear front panel to enable full operation	
HS01-P	2 x Duplex handspike with 3 metre lead length	
HS02-P	Duplex handspikes with 3 and 15 metre lead length	
LS03-P	Lead set with 3 metre leads terminated in large Kelvin clips type KC3	
LS04-P	Lead set with 3 metres and 15 metres lead length terminated in large Kelvin clips type KC3	
LS05	Lead set with 4 x 1 metre leads terminated in banana plugs, 4 x crocodile clips, 4 x test probes and 2 x Kelvin clips type KC1	
LS06-P	Lead set with 1 metre leads terminated in miniature Kelvin clips type KC2	
MTS2	Calibration standard	

FOR FURTHER INFORMATION VISIT WWW.CROPICO.COM

DO5000/DO5001 SPECIFICATIONS

Range	Resolution	Minimum Current	Maximum Current	Accuracy at Full Rated Current
30kΩ	1Ω	10μA	100μA	±(0.03% Rdg +0.02% FS)
3kΩ	100mΩ	100μA	1mA	±(0.03% Rdg +0.01% FS)
300Ω	10mΩ	1mA	10mA	±(0.03% Rdg +0.01% FS)
30Ω	1mΩ	10mA	100mA	±(0.03% Rdg +0.01% FS)
3Ω	100μΩ	100mA	1A	±(0.03% Rdg +0.01% FS)
200mΩ	10μΩ	1A	10A	±(0.03% Rdg +0.01% FS)
30mΩ	1μΩ	1A	10A	±(0.03% Rdg +0.01% FS)
3mΩ	100nΩ	1A	10A	±(0.03% Rdg +0.02% FS)

DO5002 SPECIFICATIONS

Range	Resolution	Typical Current	Maximum Current	Accuracy at Full Rated Current
30kΩ	1Ω	10μA	100μA	±(0.03% Rdg +0.02% FS)
3kΩ	100mΩ	100μA	1mA	±(0.03% Rdg +0.01% FS)
300Ω	10mΩ	1mA	10mA	±(0.03% Rdg +0.01% FS)
30Ω	1mΩ	10mA	100mA	±(0.03% Rdg +0.01% FS)
3Ω	100μΩ	10mA	100mA	±(0.03% Rdg +0.01% FS)
200mΩ	10μΩ	10mA	100mA	±(0.03% Rdg +0.01% FS)

Measurement

4 terminal Kelvin/Thomson principle eliminates errors due to lead resistance

Display

LCD graphics panel with backlit 30,000 count

Ranges

8 automatic or manual selection

Terminals

4mm safety sockets

Working Temperature

0°C to +45°C rel. humidity 80% max. non-condensing

Storage Temperature

-20°C to +60°C

Mains Supply

115/230V +10% -10%
47Hz to 163Hz 20VA

Safety

EN 61010-1 EMC-EN 61236

Dimensions

339mm x 324mm x 131mm (W H D) approx

Mass

12kg approx. 12kg packed in carton

Auto Zero

Permits the zero of measurement values

Average

Automatic average and display of measurement with forward and reverse current

Auto Temperature Compensation

Automatically references measurement to temperature of 20°C or user defined temperature. User coefficients may be used. External Pt100 senses temperature manual value can be used

Hi / Lo Limits

Limit values can be set over entire measurement range

Calibration

Digital pass code protected

Protection

415 Vrms maximum at the measuring terminals will blow internal protection fuse

CODE	ITEM	DO5000 SERIES OPTIONS
C02		1 metre cable clamp with metal base for the precise measurement of 1 metre cable samples 0.1...100mm ²
C02A		1 metre cable clamp with metal base for the precise measurement of 1 metre cable samples 1...1000mm ²
C03		1 metre cable clamp with water bath for the precise measurement of 1 metre cable samples 1...1000mm ²
DO500-CS		Calibration standard
HS01-P		Duplex handspikes with 3 metre lead length
HS02-P		Duplex handspikes with 3 and 15 metre lead length
IEEE-DO5		Interface IEEE-488
IEEE-L01		IEEE-488 cable 1 metre
LS03-P		Lead set with 3 metre leads terminated in large Kelvin clips type KC3
LS04-P		Lead set with 3 metre and 15 metre lead length terminated in large Kelvin clips type KC3
LS05		Lead set with 4 x 1 metre leads terminated in banana plugs, 4 x Crocodile clips, 4 x test probes and 2 x Kelvin clips type KC1
LS06-P		Lead set with 1 metre leads terminated in miniature Kelvin clips type KC2
PLC-DO5		Interface PLC
PT02-DO5		Temperature probe with 2 metre lead length

D07 PLUS SPECIFICATIONS

Range	Current	Resolution	FSV	Uncertainty
6.0000 mΩ	10 A	100 nΩ	60 mV	0.05% Rdg +0.01%FS
60.000 mΩ	1 A	1 μΩ	60 mV	0.05% Rdg +0.01%FS
600.00 mΩ	100 mA	10 μΩ	60 mV	0.05% Rdg +0.01%FS
6.0000 Ω	10 mA	100 μΩ	60 mV	0.05% Rdg +0.01%FS
60.000 Ω	1 mA	1 mΩ	60 mV	0.05% Rdg +0.01%FS
600.00 Ω	100 μA	10 mΩ	60 mV	0.05% Rdg +0.01%FS
6.0000 kΩ	100 μA	100 mΩ	600 mV	0.05% Rdg +0.01%FS

Measurement

4 terminal Kelvin / Thompson principle eliminates errors due to lead resistance

Display

60,000 count + sign LCD graphics panel with backlight Select display value of °C or °F

Ranges

7 resistance ranges

Terminals

4mm safety sockets

Working Temperature

0 deg C to 40 deg C

Storage Temperature

-20 deg C to +50 deg C

Safety

Conforms to EN 61010-1:2001 600V Cat 3

Dimensions

358mm X 269mm X 155mm

Mass

<5Kg (instrument only)

Calibration

Digital Password protected, manual or via remote interface

Battery

Internal, fixed NiMh battery pack, Gas Gauge circuits to monitor battery capacity. Internal automatic FAST / TRICKLE battery Charger. DC input from 9V to 36V.

Mains Supply

External mains psu 90V – 253V, 47Hz to 63Hz with interchangeable plugs.

CODE ▾	ITEM ▾	D07PLUS OPTIONS
LS05	Lead set with 4 x 1 metre leads terminated in banana plugs, 4 x Crocodile clips, 4 x test probes and 2 x Kelvin clips type KC1	
LS03-P	Lead set with 3 metre leads and terminated with large Kelvin clips type KC3	
LS04-P	Lead set with 3 metres and 15 metres lead length terminated in large Kelvin clips type KC3	
HS01-P	2 x Duplex handspike with 3 metre lead length	
HS02-P	Duplex handspikes with 3 and 15 metre lead length	
CH01	Concentric handspikes 3M lead length	
MTS 5	Calibration Standard Note: Lead sets can be supplied in different lengths to order	
C02	1 metre cable clamp with metal base for the precise measurement of 1 metre cable samples 0.1...100mm2	
CO2A	1 metre cable clamp with metal base for the precise measurement of 1 metre cable samples 1...1000mm2	
C03	1 metre cable clamp with water bath for the precise measurement of 1 metre cable samples 1...1000mm2	

DO7 SPECIFICATIONS

Range	Resolution	Typical Current	Accuracy at 20°C ±5°C, 1 Year	Temp Coefficient/°C
60Ω	10mΩ	1mA	±(0.15% Rdg +0.05% FS)	40ppm Rdg + 30ppm FS
6Ω	1mΩ	10mA	±(0.15% Rdg +0.05% FS)	40ppm Rdg + 30ppm FS
600mΩ	100μΩ	100mA	±(0.15% Rdg +0.05% FS)	40ppm Rdg + 30ppm FS
60mΩ	10μΩ	1A	±(0.15% Rdg +0.05% FS)	40ppm Rdg + 30ppm FS
6mΩ	1μΩ	10A	±(0.2% Rdg +0.01% FS)	40ppm Rdg + 30ppm FS
600μΩ	0.1μΩ	10A	±(0.2% Rdg +0.2% FS)	40ppm Rdg + 250ppm FS

Measurement

4 Terminal Kelvin / Thomson principle eliminates errors due to lead resistance. Open circuit measurement voltage = 2V dc

Display

0.8" LED 6000 count with automatic decimal point and polarity indication

Ranges

6 push button selected with LED indication

Terminals

6mm binding posts accept spade tags and 4 mm banana plugs

Working Temperature

0°C to 40°C rel. humidity 80% max. non-condensing

Storage Temperature

-20 to +50°C

Mains Supply

100 / 120 / 220 / 240 Volts
+10% - 13% 47Hz to 63Hz. max 80VA

Safety

IEC 1010 Protective Class 1

Dimensions

343mm x 327mm x 152mm (W D H) approx

Mass

8kg approx

Protection

415 Vrms maximum at input terminals

Calibration

Digital, security key protected

Battery

Sealed lead acid, rechargeable cells giving a minimum of 1 hour of continuous measurement on the lowest 10 amp ranges and 20 hours on all other ranges. Internal charger with battery state indicator

Average

Automatic average and display of measurement with forward and reverse current

CODE ▾	ITEM ▾	DO7 OPTIONS
CB03		Lead bag attaches to lid of DO7, must be ordered with DO7
DO7-RS		Remote start plug
FS01		Remote start foot switch
HS01		Duplex handspikes with 3 metre lead length
HS01-RS		Duplex handspikes with 3 metre lead length with remote start button
HS02		Duplex handspikes with 3 and 15 metre lead length
HS02-RS		Duplex handspikes with 3 and 15 metre lead length with remote start button
LS03		Lead set with 3 metre leads terminated in large Kelvin clips type KC3
LS04		Lead set with 3 metre and 15 metre lead length terminated in large Kelvin clips type KC3
LS05		Lead set with 4 x 1 metre leads terminated in banana plugs, 4 x Crocodile clips, 4 x test probes and 2 x Kelvin clips type KC1 in miniature Kelvin clips type KC2
MTS2		Calibration standard
RSL01		RS232 cable

DO7E

RUGGED DIGITAL MICROHMMETER FOR LOW RESISTANCE MEASUREMENT

The DO7e is a very rugged yet compact and portable digital micro ohmmeter for the measurement of low resistance. Using a rechargeable sealed lead acid battery with built-in charger, the DO7e is capable of measuring with a current of 10 Amps on the lowest range. The DO7e has been designed with the latest solid state and microprocessor techniques to ensure the very best in measurement, reliability and features. Automatic range selection, forward and reverse current measurements with auto average and a remote start socket are all included as well as an energy saving power down mode.

KEY FEATURE	DO7E
True 4 wire measurement eliminates lead resistance	■
6 push button ranges 6 milli ohm to 600 ohm	■
Resolution 1 micro ohm on 6 milli ohm range	■
Auto ranging	■
10 Amp measuring current on lowest range	■
0.8" LED Display daylight viewable	■
Input protection up to 415 Volts rms	■
Forward and reverse current measurement	■
Auto average of forward and reverse measurement	■
Auto power off	■
Mains / rechargeable battery operation	■
Digital calibration pass code protected	■



DO7E SPECIFICATIONS

Range	Resolution	Typical Current	Accuracy at 20°C ±5°C, 1 Year	Temp Coefficient/°C
600Ω	100mΩ	1mA	±(0.25% Rdg +0.05% FS)	40ppm Rdg + 30ppm FS
60Ω	10mΩ	10mA	±(0.25% Rdg +0.05% FS)	40ppm Rdg + 30ppm FS
6Ω	1mΩ	100mA	±(0.25% Rdg +0.05% FS)	40ppm Rdg + 30ppm FS
600mΩ	100μΩ	1A	±(0.25% Rdg +0.05% FS)	40ppm Rdg + 30ppm FS
60mΩ	10μΩ	1A	±(0.25% Rdg +0.05% FS)	40ppm Rdg + 30ppm FS
6mΩ	1μΩ	10A	±(0.25% Rdg +0.05% FS)	40ppm Rdg + 250ppm FS

Measurement

4 Terminal Kelvin / Thomson principle eliminates errors due to lead resistance. Open circuit measurement voltage = 2V dc

Display

0.8" LED 6000 count with automatic decimal point and polarity indication

Ranges

6 push button selected with LED indication

Terminals

Binding posts accept 4mm spade tags, 6mm bare wires and 4mm banana plugs (4mm safety sockets)

Working Temperature

0°C to 40°C rel. humidity 80% max. non-condensing

Storage Temperature

-20 to +50°C

Mains Supply

115/230 Volts +10%-10%
47 to 63Hz 20VA

Safety

EN 61010-1 EMC - EN 61236

Dimensions

343mm x 327mm x 152mm (W D H) approx

Mass

6kg approx

Protection

415 Vrms maximum at input terminals

Calibration

Digital Pass code protected

Battery

Sealed lead acid battery with built-in charger. Greater than 1000 measurements on lowest (10A range) and 20 hours on other ranges from a fully charged battery

Average

Automatic average and display of measurement with forward and reverse current

CODE ▾	ITEM ▾	DO7E OPTIONS
CB03	Lead bag attaches to lid of DO7e must be ordered with DO7e	
D07-RS	Remote start plug	
FS01	Remote start foot switch	
HS01	Duplex handspikes with 3 metre lead length	
HS01-RS	Duplex handspikes with 3 metre lead length with remote start button suitable for DO7 and DO7e	
HS02	Duplex handspikes with 3 and 15 metre lead length	
HS02-RS	Duplex handspikes with 3 and 15 metre lead length with remote start button	
LS03	Lead set with 3 metre leads terminated in large Kelvin clips type KC3	
LS04	Lead set with 3 metres and 15 metres lead length terminated in large Kelvin clips type KC3	
MTS2	Calibration standard	

DO7010 SPECIFICATIONS

Range	Resolution	Typical Current	Accuracy at 20°C ±5°C, 1 Year	Temp Coefficient/°C
6Ω	1mΩ	100mA/1A	±(0.1% Rdg +0.1% FS)	40ppm Rdg + 30ppm FS
600mΩ	100μΩ	1A/10A	±(0.1% Rdg +0.1% FS)	40ppm Rdg + 30ppm FS
60mΩ	10μΩ	1A/10A	±(0.1% Rdg +0.1% FS)	40ppm Rdg + 30ppm FS
6mΩ	1μΩ	1A/10A	±(0.1% Rdg +0.1% FS)	40ppm Rdg + 30ppm FS

Measurement

4 Terminal Kelvin/Thomson principle eliminates error due to lead resistance. Open circuit measurement voltage =5Vdc

Display

240 x 64 dot graphics LCD with backlight

Ranges

4 ranges with auto range mode. Two selectable measuring currents for each range

Terminals

The measurement leads are connected via Jaeger connectors and a full range of lead configurations are available

Working Temperature

0°C to +50°C rel. humidity up to 80% non condensing

Storage Temperature

-20 to +50°C

Safety

Conforms to EN 61010-1, Main instrument Class 111 (SELV), Battery pack Class 111 (SELV), external mains charger Class 111

Dimensions

390mm x 160mm x 270mm (W H D) approx

Mass

4kg approx

Battery

The DO7010 is supplied with battery fitted. The batteries are NiMH and the charger is external. The battery pack may be removed from the front panel when discharged and a replacement charged pack inserted. This ensures minimum down-time when making measurements

Remote Terminal

The remote terminal emulates the DO7010 front panel and all functions and readings are fully controllable up to 15 metres from the ohmmeter. Connection is made through the RS232 terminal

Lead Sets

We offer a wide variety of lead sets with 3 sizes of Kelvin clip or handspikes. Lead lengths may be up to 100 meters total loop

Data Logging

The DO7010 has data logging modes. The first will store each reading with record number date and time. The second is a sequence mode which will store values with operator ID, serial number etc

CODE	ITEM	DO7010 OPTIONS
DO7010-BP	Battery pack	
DO7010-REM	Remote terminal emulates the DLRO710 front panel and permits the operation remotely up to 15 metres. Supplied complete with 15 metre RS232 cable	
HS01-710	Duplex handspikes with 3 metre lead length	
HS02-710	Duplex handspikes with 3 and 15 metre lead length	
LS03-710	Lead set with 3 metre leads and terminated with large Kelvin clips type KC3	
LS04-710	Lead set with 3 metres and 15 metres lead length terminated in large Kelvin clips type KC3	
MTS3	Calibration Standard	
REMT015	Remote terminal cable 15 metres	
RSL04	RS232 interface cable 1 metre	
XL-710	Excel spread sheet software permits upload of measurement parameters and download of stored values	

Operating Principle

The resistance of windings is measured by passing DC current through the unknown resistance, and measuring the resulting voltage drop. The DO8000 calculates the resistance by the formula $R = E/I$.

Winding resistance challenges

Measuring small resistance in a highly inductive environment can be a challenging task. The voltage across an inductor is defined by the formula $V = L di/dt$. Some power transformers have inductance (L) of over 1000 henrys, therefore minute changes in current will result in undesirable voltage swings that can make it impossible to measure the DC resistance of the transformer windings. The Cropico DO8000 addresses this challenge in several ways so that the instrument is able to achieve stable resistance readings on the largest of transformers in record time.

- The DO8000 uses a powerful, highly regulated and filtered constant current source to drive current through the windings.
- The DO8000 uses a 30 volt source, which is sufficient to drive the core into saturation where small changes in current have no effect on the measured resistance.
- By connecting primary and secondary in series, speed of saturation is increased because there are more Amp turns contributing to the flux in the core. The resistance measurement of both windings are made at the same time, on channels A & B.

DO8000 SPECIFICATIONS

Measurement

4 wire eliminates lead resistance

Display

LCD Graphics colour LCD display visible in bright sunshine

Ranges

Manual/Automatic independently selectable for each measuring channel

Terminals

4 mm safety sockets

Working Temperature

-10°C to +50°C

Storage Temperature

-15°C to +80°C

Relative Humidity

0 to 90% non condensing

Mains Supply

90 to 132Vac 50/60Hz, 198 to 256Vac 50/60Hz 550VA max

Safety

EN 61010 EN 61326

Dimensions

470mm x 360mm x 180mm (W H D) approx

Mass

11.4kg approx

Protection

Protected from overvoltage transients & substation noise, high speed current interrupt detector, audible warning during and after test, emergency stop button

Memory

Over 100 files with over 120 measurements each in text files that are compatible with most spreadsheet formats

Systems Interface

RS232 and USB ports

CODE ▾

ITEM ▾

DO8000 OPTIONS

CR-001

Shipping crate

LS03-8000

Lead set with 3 metre leads terminated in large Kelvin clips type KC3

LS04-8000

Lead set with 3 metre and 15 metre lead length terminated in large Kelvin clips type KC3

MTS 1A SPECIFICATIONS

Resistance Value	Uncertainty of Adjustment @ 20°C	Watts Max W	Current Max A	Typical Temp Coefficient
100kΩ	±0.01%	0.1	1mA	<10ppm
10kΩ	±0.01%	0.1	3mA	<10ppm
1kΩ	±0.01%	0.6	25mA	<10ppm
100Ω	±0.01%	0.6	75mA	<10ppm
19Ω	±0.01%	0.43	150mA	<10ppm
10Ω	±0.01%	0.45	212mA	<10ppm
1.9Ω	±0.01%	0.475	500mA	<10ppm
1Ω	±0.01%	0.56	750mA	<10ppm
100mΩ	±0.01%	0.525	2.5A	<10ppm
10mΩ	±0.05%	0.25	5A	<10ppm
1mΩ	±0.05%	0.1	10A	<10ppm

MTS 2 SPECIFICATIONS

Resistance Value	Uncertainty of Adjustment @ 20°C	Watts Max W	Current Max A	Typical Temp Coefficient
400kΩ	±0.01%	0.1	0.45mA	<10ppm
40kΩ	±0.01%	0.1	1.5mA	<10ppm
4kΩ	±0.01%	0.1	5mA	<10ppm
400Ω	±0.01%	0.1	15mA	<10ppm
40Ω	±0.01%	0.1	50mA	<10ppm
4Ω	±0.01%	0.1	150mA	<10ppm
400mΩ	±0.01%	0.1	500mA	<10ppm
40mΩ	±0.01%	0.1	1.5A	<10ppm
4mΩ	±0.1%	0.4	10A	<10ppm
400μΩ	±0.1%	0.04	10A	<10ppm

Working Temperature

+5 to +40°C

Storage Temperature

+5 to +50°C

Dimensions

215mm x 88mm x 250mm (W H D) approx

Mass

2.8kg approx

Terminal

4mm binding posts will accept spade tags and 4mm banana plugs. Low thermal E.M.F. types are used for the potential terminals

Switches

Combination switch with low thermal contacts for the potential selection and low resistance contacts for the current selection

D05000-CS

CALIBRATION STANDARD FOR D05000

The calibration Standard D05000-CS is designed to enable the full calibration of the Digital microhmmeter type D05000, The resistance ranges are adjusted to a nominal accuracy and the actual value is measured and recorded on the calibration certificate. The value on the calibration certificate is the value that should be used when calibrating the D05000.

KEY FEATURE	D05000-CS
True 4 terminal standards	■
Switch selectable values	■
Polarity Reversal switch	■
Four terminal zero	■
PT100 calibration	■
Upto 10A calibration current	■

D05000-CS SPECIFICATIONS

CURRENT RANGES

Current	Normal Accuracy
100mA	±0.05%
1mA	±0.05%
10mA	±0.05%
100mA	±0.05%
1A	±0.05%
10A	±0.05%

RESISTANCE RANGES

Resistance Range	Nominal Accuracy	Certified Accuracy
30kOhm	±0.01%	±0.01%
3kOhm	±0.01%	±0.01%
300Ohm	±0.01%	±0.01%
30 Ohm	±0.01%	±0.01%
3 Ohm	±0.05%	±0.01%
300mOhm (200mOhm)	±0.05%	±0.01%
30mOhm	±0.05%	±0.01%
3mOhm	± 1%	±0.02%

TEMPERATURE RANGES

Temperature	Nominal Accuracy	Certified Accuracy
0°C	± 1%	±0.05%
100°C	± 1%	±0.05%

Working Temperature

0 to +40°C

Storage Temperature

0 to +40°C

Dimensions

460mm x 420mm x 180mm

Weight

5Kg

Terminals

4mm safety sockets. Low thermal EMF types.

Switches

Combination switch with low thermal contacts for the potential selection and low resistance contacts for the current and range selections




CO2/CO2-A/CO3

COST EFFECTIVE CABLE CLAMPING DEVICES FOR PRECISE MEASUREMENT

KEY FEATURE	CO2	CO2-A	CO3
1M long reference measurement	■	■	■
Test unit cross sections 0.1mm to 100mm	■		■
Test unit cross sections 0.1mm to 1000mm		■	
Integrated Water bath for temp correction	■		■
Current connections up to 100A	■	■	■
Guide rail for support	■	■	

During the manufacture of wires, rails, cables and conductors, the electrical conductivity (resistance) must be checked for compliance with specified values. In conjunction with one of our range of digital ohmmeters, the clamping devices are used in the cable industry for production monitoring and quality assurance.

CO2

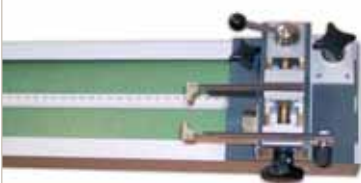

Adjustable clamp support: measurement length of up to 1000mm.
 Test unit cross-sections: ranging from 0.1mm² to approximately 100mm²
 Current connections: designed for up to 100A. Potential tap: routed to 4mm standard terminals using material with low thermal E.M.F.
 Dimensions (height x width x depth): 1300mm x 120mm x 150 mm. Weight: Approximately 8.5kg

CO2-A



Measurement length: 1000mm. Clamping device: designed for cross sections of 1mm² to 1000mm². Distance between voltage and current-clamp: 420mm. Dimensions (height x width x depth): 170mm x 2100mm x 250 mm. Weight: Approximately 25kg.

CO3

Measurement length: 1000mm in a temperature controlled water bath. Clamping device: designed for cross sections of 1mm² to 1000mm². Constant water temperature ensured by a two position controller and an integrated circulation pump. Precise temperature measurement with an integrated sensor. Operating range: 25 °C to 60 °C, tolerance +/- 0.5 °C. Current connections: designed for up to 100A. Output of the integrated heating filaments: 2kW Voltage supply: 230V, +6% - 10%. Mains frequency: 50/60 Hz. Power consumption: approximately 2.2kVA. Device protection: in accordance with VDE 0411. Dimensions (height x width x depth): 300 x 2100 x 750 mm. Without wire holder: (height x width x depth): 300mm x 1330mm x 500 mm. Weight (without water): Approximately 80kg.

THE 3000 SERIES

PORTABLE HIGH ACCURACY TEMPERATURE INDICATOR WITH FULL INSTRUMENT CONTROLS, PT25, PT100 AND 13 THERMOCOUPLE TYPES

Cropico has produced a family of precision digital thermometers, the series 3000. Three units, all with 1 Millikelvin resolution for RTDs, are offered with a range of standard features and a list of "mix-and-match" options which will provide a very high degree of flexibility.

The units can be used by Quality Assurance departments throughout the process industries for calibrating temperature probes, particularly in ISO-9000 applications, and they also have wide-ranging use where high accuracy temperature measurement is essential and where values have to be stored for data processing.

Two-channel input provides A, B or A-B measurement on an LCD display, and front panel keys are provided for the most commonly used functions. Pull-down menus provide further functions, such as the selection of thermocouples. Probe characteristics can be stored for optimum accuracy, and the measuring current can be reduced by half power to check the probe's self heating.

Other features include mains or rechargeable battery operation, with built-in charger, and two interface options - RS232 and IEEE-488 - by plug-in cards. An analogue output, via a BNC socket, is another option.

The 3000 series include an inbuilt data logger which can store upto 4000 date and time stamped readings. Recall the data from the front panel or send to a PC via either RS232 or IEEE both of which are options.

The 3000 series offer ease of use. Password protected digital calibration and a large clear backlit LCD graphics panel ensure the 3000 series are easy for all levels to use.

The 3000 series have the ability to take reverse measurements switching the polarity then computing the average to eliminate the error source. This reduces the thermal E.M.F. which most resistance thermometers suffer from. The thermal E.M.F error can be greater than the quoted accuracy of an instrument. If you need small measurement uncertainty for high temperature PRT work, you need this feature.

KEY FEATURE	3000	3001	3002
Accuracy of RTD measurement 0.01°C	■	■	■
Accuracy of T/C measurement 0.1°C	■	■	
1 milli kelvin resolution for RTD's	■	■	■
10 milli kelvin resolution for T/C	■	■	
2 Measuring inputs	■	■	■
10 thermocouples B,E,J,K,N,R,S,T,D,C	■	■	
T/C reference junction internal or external	■	■	
Pt 25 sensor	■		
Pt 100 sensor	■	■	■
Input of RTD characteristics	■	■	■
Probe self-heat check	■	■	■
Automatic current reversal for RTD's	■	■	■
Suitable for 3 and 4 wire RTD's	■	■	■
Units °C, °F, °K, mV or ohm	■	■	
Units °C, °F, °K or ohm	■	■	■
Maths function max / min std. deviation	■	■	■
Data logging 4000 values	■	■	■
Digital calibration	■	■	■
Rechargeable sealed lead acid battery	■	■	■



3000 SPECIFICATIONS

Sensor	Range °C	Resistance Ω	Current	Resolution °C, °F, °K	Accuracy Typically @ 20°C ±5°C
Pt25	-200 to -100	2.5 to 15	1mA	0.001	0.02°C
Pt25	-100 to +500	15 to 75	1mA	0.001	0.01°C
Pt25	+500 to +670	75 to 115	mA	0.001	0.02°C
Pt100	-200 to -100	10 to 60	0.5mA	0.001	0.02°C
Pt100	-100 to +500	60 to 280	0.5mA	0.001	0.01°C
Pt100	+500 to +670	280 to 460	0.5mA	0.001	0.02°C

3001 SPECIFICATIONS

Sensor	Range °C	Resistance Ω	Current	Resolution °C, °F, °K	Resistance	Accuracy Typically @ 20°C ±5°C
Pt100	-200 to -100	10 to 60	1mA	0.001	0.001Ω	0.02°C
Pt100	-100 to +500	60 to 280	1mA	0.001	0.001Ω	0.01°C
Pt100	+500 to +800	280 to 450	1mA	0.001	0.001Ω	0.02°C

3002 SPECIFICATIONS

Sensor	Range °C	Resistance Ω	Current	Resolution °C, °F, °K	Resistance	Accuracy Typically @ 20°C ±5°C
Pt100	-200 to -100	10 to 60	1mA	0.001	0.001Ω	0.02°C
Pt100	-100 to +500	60 to 280	1mA	0.001	0.001Ω	0.01°C
Pt100	+500 to +800	280 to 450	1mA	0.001	0.001Ω	0.02°C

THERMOCOUPLE TYPE CHART FOR THE 3000 AND 3001

Sensor	Range °C	Common Name	Resolution °C, °F, °K	Standard	Uncertainty @ 20°C ±5°C 1 Year	Uncertainty @ 20°C ±5°C 60 Days
B	+250 to +1820	Platinum / Rhodium	0.01	NIST 175	±(0.025%Rdg. + 0.006%FS)	±(0.02%Rdg. + 0.006%FS)
C	0 to +2315	Tungsten / Rhenium	0.01	ASTM E988	±(0.075%Rdg. + 0.005%FS)	±(0.05%Rdg. + 0.005%FS)
D	0 to +2315	Tungsten / Rhenium	0.01	ASTM E988	±(0.075%Rdg. + 0.005%FS)	±(0.05%Rdg. + 0.005%FS)
E	-200 to +1000	Chromel / Constantan	0.01	NIST 175	±(0.026%Rdg. + 0.004%FS)	±(0.01%Rdg. + 0.004%FS)
J	-210 to +1200	Iron / Constantan (SAMA)	0.01	NIST 175	±(0.03%Rdg. + 0.005%FS)	±(0.008%Rdg. + 0.005%FS)
K	-200 to +1372	Chromel / Alumel	0.01	NIST 175	±(0.035%Rdg. + 0.006%FS)	±(0.01%Rdg. + 0.006%FS)
N	-200 to +1300	Nicrosil / Nisil	0.01	NIST 175	±(0.035%Rdg. + 0.005%FS)	±(0.01%Rdg. + 0.005%FS)
R	-50 to +1768	Platinum / Rhodium	0.01	NIST 175	±(0.02%Rdg. + 0.015%FS)	±(0.005%Rdg. + 0.015%FS)
S	-50 to +1768	Platinum / Rhodium	0.01	NIST 175	±(0.02%Rdg. + 0.015%FS)	±(0.005%Rdg. + 0.015%FS)
T	-200 to +400	Copper / Constantan	0.01	NIST 175	±(0.025%Rdg. + 0.015%FS)	±(0.005%Rdg. + 0.015%FS)
U	-200 to +600	Copper / Constantan	0.01	DIN 43710	±(0.025%Rdg. + 0.015%FS)	±(0.005%Rdg. + 0.015%FS)
L	-200 to +500	Iron / Constantan	0.01	DIN 43710	±(0.03%Rdg. + 0.005%FS)	±(0.008%Rdg. + 0.005%FS)
Au/Pt	0 to +1000	Gold / Platinum	0.01	NIST-Burns	±(0.02%Rdg. + 0.015%FS)	±(0.005%Rdg. + 0.015%FS)

3000 Series continued ►►

THE 3000 SERIES

Display	LCD Graphics panel with backlight
Terminals	4mm safety sockets and 6 pin Lemo socket
Working Temperature	0°C to +40°C re. humidity 80% max. non-condensing
Storage Temperature	-20°C to +50°C
Mains Supply	100/120/220/240 Volts +10% to 13% 47Hz to 63Hz 40VA
Safety	EN 61010-1 EMC-EN 61236
Dimensions	219mm x 315mm x 110mm (W H D) approx 1/2 19" Rack 2 1/2 U high
Mass	5.5kg approx
Calibration	Digital Pass code protected
Battery	Sealed Lead acid battery with internal intelligent charger. 14 hours approx operation from full charge, may be used whilst charging

Inputs	Thermocouples via 4mm sockets in copper block on 19mm pitch, adaptor plugs available for direct thermocouple wire connection. PRT via Lemo low thermal sockets. 3002 model has low thermal E.M.F sockets only
Average	Automatic average and display of PRT measurements with forward and reverse current
Auto Temperature Compensation for Thermocouples	<i>Automatic Internal</i> - Automatically references measurement to temperature of 20°C or other user defined temperature. User coefficients may be used <i>Automatic External</i> - External Pt100 sensor temperature manual value can also be used
HI / Low Limits	Limit values can be set over entire measurement range
Interfaces	Interface cards are available as option, only one card may be fitted. <i>RS232</i> : To specification ANSI/EIA/TIA/-232-E-1991 <i>IEEE-488</i> : Conforms to ANSI-IEEE Std 488, 1-1987 and performs the following functions: SH1, AH1,T5,TEO, L3, LEO, SR1, RL1, PPO, DT1, CO, E2. Interface may be set to 'talk only' mode to permit stand alone printer output <i>Scanner Option</i> : 2 additional input cards may be fitted, each card has 4 measurement channels. Measurement and scan sequences may be configured from the front panel. Full accuracy is maintained
Thermocouples	The above readings apply to values with the reference junction switched off. Reference junction uncertainty when used in automatic mode is better than 0.1°C at 20 °C with a deviation of not more than 0.01 °C/°C over the range 0 to 100 °C. RTD types linearised to ITS-90 conforms to EN 60751. Thermocouples are not available on 3002 model

Scanner Options

The 3000 series scanner option provides for multi inputs of either thermocouples or Pt100 sensors. Two channel cards may be fitted each with four input channels, which may be either thermocouples or Pt100. The flexibility of the system is such that scanner cards can be interchanged giving 10 channels for Pt100, 10 channels for thermocouples, or 4 channels thermocouples plus 4 channels Pt100 plus the two front panel inputs, which may be either Pt100 or thermocouples. No other instrument in this price range gives the versatility and accuracy of measurement to match the 3000.

CODE ▾	ITEM ▾	3000 SERIES OPTIONS	3000	3001	3002
3000-01	RS232 interface		■	■	■
3000-03	IEEE-488 interface		■	■	■
3000-04	Analogue output		■	■	■
3000-05	Scanner option, input cards to be ordered separately		■	■	■
3000-06	Scanner card for Pt100 4 channels. Scanner option 3000-05 must be installed		■	■	■
3000-07	Scanner card for thermocouple inputs 4 channels. Scanner option 3000-05 must be installed		■	■	■
3000-A-10	Calibration cable		■	■	■
3000-A-11	Calibration standards for Pt100 channels, consisting of 3 standard resistors 100, 250, and 400 ohm		■	■	■
3000-A-12	Adapter box 4mm copper terminals to Lemo plug		■	■	■
3000-A-13	RTD Lemo input plug		■	■	■
3000-A-20	Thermocouple plug with screw terminals materials type R S B J T E K available please specify when ordering		■	■	■
3000-A22	External thermocouple reference junction		■	■	■
RSL-02	RS232 Cable		■	■	■

PT100S/1 & /2

ACCURATE AND RELIABLE RESISTANCE THERMOMETER SIMULATORS

KEY FEATURE	PT100s
High calibration accuracy	■
2 models available	■
Rugged construction metal case	■
High quality switching	■
High accuracy wire wound resistance elements	■
Calibration traceable to international standards	■
Calibrated to IEC 751, DIN 43760 and BS1904	■

Designed for the accurate and reliable simulation of platinum resistance thermometers (Pt100), the simulators Pt100S/2 and Pt100S/1 offer 2 low cost options. Both models are calibrated to international standards.

Pt100S/1: Uses 2 wire simulation and 12 set points calibrated direct in °C.

Pt100S/2: Suitable for 2, 3 and 4 wire connection and incorporates the high quality Cropico SP1 switch together with high accuracy wire wound resistance elements. This construction gives both high performance and permanence of calibration.

PT100S/1 SPECIFICATIONS

Temp °C	-20	0	10	20	40	60	80	100	150	200	250	300
Accuracy	±0.3											
Temp Coeff 15 to 25°C	< 15 ppm/°C											

PT100S/2 SPECIFICATIONS

Temp °C	-100	-80	-60	-40	-20	-10	0	10	20	30	40	50
Accuracy	±0.15											
Temp Coeff 15 to 25°C	< 10 ppm/°C											
Temp °C	60	70	80	90	100	150	200	250	300	350	400	500

PT100S/1

Terminals

2 4mm binding posts accept spade and 4mm banana plugs

Working Temperature

+5 to 20 to 40°C

Storage Temperature

-5 to +50°C

Dimensions

120mm x 65mm x 60 mm (W H D) approx

Mass

0.55kg approx

Switch

High quality switch, silver contacts with low stable contact resistance

Resistance Elements

Selected precision metal film

Case

Painted aluminium

PT100S/2

Terminals

4 4mm binding posts accept spade and 4mm banana plugs

Working Temperature

+5 to 20 to 40°C

Storage Temperature

-5 to +50°C

Dimensions

190mm x 110mm x 95 mm (W H D) approx

Mass

0.75kg approx

Switch

Cropico type SP1 switch with low and constant contact resistance

Resistance Elements

Wire wound resistors with low temperature co-efficient and long term stability. 0.01%/year

Case

Painted aluminium

DP6 SPECIFICATIONS

Code	Thermocouple Type °C	Range	Accuracy @ Source
B	PtRh30-PtRh6	+500 to +1820 +200 to +500 +60 to +200	±0.5°C ±1.5°C ±6.5°C
E	NiCr-CuNi	-200 to +1000 -250 to -200 -270 to -250	±0.2°C ±0.6°C ±6.0°C
J	Fe-CuNi	+800 to +1200 +200 to +800 0 to +200 -210 to 0	±0.3°C ±0.2°C ±0.1°C ±0.3°C
K	NiCr-NiAl	+1000 to +1370 +100 to +1000 -50 to +100 -150 to -50 -225 to -150 -270 to -225	±0.4°C ±0.3°C ±0.1°C ±0.2°C ±0.5°C ±3.0°C
L	Fe-CuNi	+300 to +900 -100 to +300 -200 to -100	±0.2°C ±0.1°C ±0.15°C
N	NiCrSi-NiSi	+1100 to +1300 +400 to +1100 +150 to +400 0 to 150	±0.4°C ±0.3°C ±0.15°C ±0.1°C
R	PtRh13-Pt	+1200 to +1760 +100 to +1200 0 to +100 -50 to 0	±0.8°C ±0.4°C ±0.5°C ±0.8°C
S	PtRh10-Pt	+1400 to +1760 +1200 to +1400 +50 to +1200 -50 to +50	±0.95°C ±0.5°C ±0.4°C ±0.6°C
T	Cu-CuNi	-100 to +400 -230 to -100 -250 to -230 -270 to -250	±0.2°C ±0.5°C ±1.0°C ±2.5°C
U	Cu-CuNi	+300 to +400 0 to +300 -150 to 0 -200 to -150	±0.2°C ±0.1°C ±0.15°C ±0.2°C

Resolution on all types of thermocouple -0.1°C, 0.1°C, 0.1°F. Limits of error apply for 1 year at 20°C ±1°C

Range	Max Display	Uncertainty	Resolution
10mV	±15.000mV	±0.02% of reading ±0.015% FS	1µV
100mV	±150.00mV	±0.01% of reading ±0.015% FS	10µV
1V	±1.5000V	±0.01% of reading ±0.015% FS	100µV

Display

4.5 digit high contrast LCD 10.2mm. Display range 19999 digits, automatic decimal point, polarity and units. Two line alphanumeric LCD for programming and display of configuration

Ranges

The reference junction reference value may also be set via the keyboard over the range 0°C to +100°C

Terminals

2 4mm low thermal E.M.F. copper terminals

Working Temperature

0°C to +40°C

Storage Temperature

-20°C to +50°C

Mains Supply

External charger operating from mains supply

Dimensions

150mm x 130mm x 60mm (W H D) approx

Mass

1.4kg approx

Calibration

Digital pass code protected

Battery

6 Volt 1.2 Ah sealed lead acid, replaceable

005/6/8 SPECIFICATIONS

008-C	008-B	008-A	006-C	006-B	006-A	005-B	Decade	Accuracy	Current Max
		■			■		10 x 0.001Ω	± 2%	1.4A
	■	■		■	■	■	10 x 0.01Ω	± 1%	1.4A
■	■	■	■	■	■	■	10 x 0.1Ω	± 0.5%	1.4A
■	■	■	■	■	■	■	10 x 1Ω	± 0.2%	300mA
■	■	■	■	■	■	■	10 x 10Ω	± 0.01%	100mA
■	■	■	■	■	■	■	10 x 100Ω	± 0.01%	30mA
■	■	■	■	■			10 x 1kΩ	± 0.01%	18mA
■	■	■	■				10 x 10kΩ	± 0.01%	5mA
■	■						10 x 100kΩ	± 0.01%	1.8mA
■							10 x 1MΩ	± 0.05%	0.3mA

Model	No. Decades	Total Resistance	Resolution	Sutable for Pt100 Simulation	Resolution °C when Simulating Pt100	Residual Resistance Ω
005-B	5	1,112.10Ω	0.01	■	0.025	1Ω
006-A	6	1,112.11Ω	0.001	■	0.0025	1Ω
006-B	6	11,112.10Ω	0.01	■	0.025	1Ω
006-C	6	111,111Ω	0.1	—	—	70mΩ
008-A	8	111,112.11Ω	0.001	■	0.0025	1Ω
008-B	8	1,111,112.1Ω	0.01	■	0.025	1Ω
008-C	8	11,111,111Ω	0.1	—	—	80mΩ

Calibration

Calibration certificates including UKAS traceable are available on request

Switches

Contact material gold plated brass
 Contact resistance = 5 mohm
 Insulation Resistance (all paths = 10Gohm)
 Proof voltage 1kV

Resistors

Temperature Co-efficient:
 ±3ppm / +20°C to + 85°C ±5ppm maximum over -55°C to +125°C 0.1, 0.01, & 0.001 dials 10ppm/°C

Full Load Stability:
 ±35ppm/10,000 hours
 ±50ppm/26,000 hours

No Load Stability:
 ±25ppm/10,000 hours
 ±35ppm/26,000 hours

Over full temperature range:
 -50°C to +125°C

Power Rating:
 0.33 watt (+85°C) 0.25 watt (+110°C)

Maximum Continuous Working Voltage:

Up to 250 V dc

Noise:

Essentially non-measurable <1.5µV

Thermal E.M.F.:

<0.4µV

Encapsulation:

Moulded epoxy

Windings:

Exclusive 'air cushioned' technique provides virtually stressless elements for improved performance. Non inductively wound. Direction of winding reversed at half turns point

Weight

005 - 0.5kg

006 - 0.6kg

008 - 0.8kg

Size

350mm x 100mm x 80mm (W H D) approx

RBB SPECIFICATIONS

RBB5				RBB6					Decade	Accuracy	Current Max mA
B	C	D	E	B	C	D	E	F			
				■					10 x 0.001Ω	± 2%	2000
■				■	■				10 x 0.01Ω	± 1%	2000
■	■			■	■	■			10 x 0.1Ω	± 0.5%	2000
■	■	■		■	■	■	■		10 x 1Ω	± 0.2%	600
■	■	■	■	■	■	■	■	■	10 x 10Ω	± 0.05%	200
■	■	■	■	■	■	■	■	■	10 x 100Ω	± 0.05%	60
	■	■	■		■	■	■	■	10 x 1kΩ	± 0.05%	20
		■	■			■	■	■	10 x 10kΩ	± 0.05%	6
			■				■	■	10 x 100kΩ	± 0.1%	2
								■	10 x 1MΩ	± 0.1%	0.3

Model	No. Decades	Total Resistance	Resolution	Sutable for Pt100 Simulation	Resolution °C when Simulating Pt100	Residual Resistance
RBB5-B	5	1,112.1Ω	0.01	■	0.025	1Ω
RBB5-C	5	11,111Ω	0.1	—	—	0.012Ω
RBB5-D	5	111,110Ω	1	—	—	0.012Ω
RBB5-E	5	1.1111MΩ	10	—	—	0.012Ω
RBB5-F	5	11,111Ω	100	—	—	0.012Ω
RBB6-B	6	1,112.11Ω	0.001	■	0.0025	1Ω
RBB6-C	6	11,112.1Ω	0.01	■	0.025	1Ω
RBB6-D	6	111,111Ω	0.1	—	—	0.013Ω
RBB6-E	6	1.11111MΩ	1	—	—	0.013Ω
RBB6-F	6	11.1111MΩ	10	—	—	0.013Ω

Calibration

Calibration certificates including UKAS traceable are available on request

Switches

Contact material gold plated brass
 Contact resistance = 5 Mohm
 Insulation Resistance (all paths = 10Gohm)
 Proof voltage 1kV

Resistors

Temperature Co-efficient:

±3ppm / +20°C to +85°C ±5ppm maximum over -55°C to +125°C 0.1, 0.01, and 0.001 dials 10ppm/°C

Full Load Stability:

±35ppm/10,000 hours
 ±50ppm/26,000 hours

No Load Stability:

±25ppm/10,000 hours
 ±35ppm/26,000 hours

Over full temperature range:

-50°C to +125°C

Power Rating:

0.33 watt (+85°C) 0.25 watt (+110°C)

Maximum Continuous Working Voltage:

70V dc / 33Vrms

Noise:

Essentially non-measurable <1.5µV

Thermal E.M.F.:

<0.4µV

Encapsulation:

Moulded epoxy

Windings:

Exclusive 'air cushioned' technique provides virtually stressless elements for improved performance. Non inductively wound. Direction of winding reversed at half turns point

Weight

RBB5 - 0.5kg

RBB6 - 0.6kg

Size

350mm x 100mm x 80mm (W H D) approx

RBC SPECIFICATIONS

Model	Decades	Total Resistance	Resolution	Resistance per Steps Ω	Accuracy %	Max Current in Amps
RBC5-A	5	11,111 Ω	0.1 Ω	10	$\pm 5\%$	0.7
RBC5-B	5	111,110 Ω	1 Ω	1	$\pm 10\%$	2.2
RBC6-A	6	111,111 Ω	0.1 Ω	0.1	$\pm 10\%$	7

Calibration

Calibration certificates including UKAS traceable are available on request

Switches

Contact material gold plated brass

Contact resistance = 5mohm

Insulation Resistance (all paths = 10Gohm)

Proof voltage 1kV

Resistors

Temperature Co-efficient:

$\pm 3\text{ppm} / +20^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ $\pm 5\text{ppm}$ maximum over -55°C to

$+125^{\circ}\text{C}$ 0.1, 0.01, and 0.001 dials 10ppm/ $^{\circ}\text{C}$

Full Load Stability:

$\pm 35\text{ppm}/10,000$ hours

$\pm 50\text{ppm}/26,000$ hours

No Load Stability:

$\pm 25\text{ppm}/10,000$ hours

$\pm 35\text{ppm}/26,000$ hours

Over full temperature range:

-50°C to $+125^{\circ}\text{C}$

Power Rating:

5W

Maximum Continuous Working Voltage:

Up to 250V dc

Noise:

Essentially non-measurable $<1.5\mu\text{V}$

Thermal E.M.F.:

$<0.4\mu\text{V}$

Encapsulation:

Moulded epoxy

Windings:

Exclusive 'air cushioned' technique provides virtually stressless elements for improved performance. Non inductively wound.

Direction of winding reversed at half turns point

Weight

5 Dial Box - 3.0kg

6 Dial Box - 3.5kg

Size

5 Dial Box - 390mm x 105mm x 130mm (W H D) approx

6 Dial Box - 450mm x 105mm x 130mm (W H D) approx

RH9A SPECIFICATIONS

RH9A-1	RH9A-2	RH9A-3	RH9A-4	Decade	Accuracy @ Certified Voltage 1Kv Max	Typical Voltage Coeff	Max V/Step	Power Rating	Temp Coeff
	■		■	10 x 1kΩ	±0.1%	-	500V	1 watt	±50 ppm /°C
	■		■	10 x 10 Ω	±0.1%	-	500V	1 watt	±50 ppm /°C
	■		■	10 x 100kΩ	±0.1%	-	500V	1 watt	±50 ppm /°C
	■	■	■	10 x 1MΩ	±0.1%	-	500V	1 watt	±50 ppm /°C
	■	■	■	10 x 10MΩ	±1%	1ppm/V	4,000V	1.5 watt	±100 ppm /°C
	■	■	■	10 x 100MΩ	±1%	1ppm/V	4,000V	1.5 watt	±100 ppm /°C
■		■	■	10 x 1GΩ	±1%	1ppm/V	5,000V	3.5 watt	±100 ppm /°C
■		■	■	10 x 10GΩ	±1%	1ppm/V	5,000V	3.5 watt	±100 ppm /°C
■		■	■	10 x 100GΩ	±2%	1ppm/V	5,000V	1.3 watt	±2,000 ppm /°C

RH9A-5 SPECIFICATIONS

Value	Accuracy @ Certified Voltage 1Kv Max	Typical Voltage Coeff	Max V/Step	Power Rating	Temp Coeff
1kΩ	±0.1%	-	500V	1 watt	±50 ppm /°C
10kΩ	±0.1%	-	500V	1 watt	±50 ppm /°C
100kΩ	±0.1%	-	500V	1 watt	±50 ppm /°C
1MΩ	±0.1%	-	500V	1 watt	±50 ppm /°C
10MΩ	±1%	1ppm/V	4,000V	1.5 watt	±100 ppm /°C
100MΩ	±1%	1ppm/V	4,000V	1.5 watt	±100 ppm /°C
1GΩ	±1%	1ppm/V	5,000V	3.5 watt	±100 ppm /°C
10GΩ	±1%	1ppm/V	5,000V	3.5 watt	±100 ppm /°C
100GΩ	±2%	1ppm/V	5,000V	1.3 watt	±2000 ppm /°C
1TΩ	±2%	1ppm/V	5,000V	1.3 watt	±2000 ppm /°C

Weight

RH9A 8.8kg
 RH9A-1 7kg
 RH9A-2 8kg
 RH9A-3 8kg
 RH9A-5 0.8kg

Size

RH9A 460mm x 380mm x 160mm (W H D) approx
 RH9A-1 460mm x 380mm x 160mm (W H D) approx
 RH9A-2 460mm x 380mm x 160mm (W H D) approx
 RH9A-3 460mm x 380mm x 160mm (W H D) approx
 RH9A-5 220mm x 110mm x 90mm (W H D) approx

RM6

WIDE RANGE, COMPACT & VERSATILE 6 DECADE RESISTANCE BOX WITH DOUBLE POLE SWITCHING

This small, cost effective decade box further enhances our comprehensive range, offering excellent value for money. This 6 decade model has a total resistance of 11.1111 Mega ohm with a resolution of 10 ohm. The accuracy of $\pm 1\%$ is achieved using metal film resistors which have a power rating of 0.4 Watt, the maximum specified voltage is 250V. Designed for durability the case is hardwood with an anodised aluminium top panel which is clearly marked with the switch position numbers and the decade values. The size is only 287 x 65 x 65 mm. The RM6 is a valuable addition to any workshop or laboratory offering a wide range of values with minimum cost.

KEY FEATURE	RM6
6 decades	■
Range 10 ohm to 10 Mega ohm	■
Accuracy 1%	■
Low cost	■

RM6 SPECIFICATIONS

Decades	Accuracy	Maximum Current
10 x 10 Ω	$\pm 1\%$	100mA
10 x 100 Ω	$\pm 1\%$	30mA
10 x 1k Ω	$\pm 1\%$	18mA
10 x 10k Ω	$\pm 1\%$	5mA
10 x 100k Ω	$\pm 1\%$	1.8mA
10 x 1M Ω	$\pm 1\%$	0.5mA

Terminals

2 binding posts will accept 4mm banana plugs and spade tags.
1 terminal for connection to panel/earth

Dimensions

287mm x 65mm x 65mm (W H D) approx

Mass

0.48kg

Resistors

Metal film 0.4 W at 70°C

Temperature coefficient ± 100 p.p.m. / °C

Switches

Silver plated brass contact resistance = 10Mohm,
positive click mechanism
Insulation Resistance >50,000Mohm

Residual Resistance

< 0.01 ohm

Case

Wood with anodised aluminium top panel



RM6N

SPACE SAVING, COMPACT & VERSATILE 6 DECADE RESISTANCE BOX WITH WIDE RANGE

KEY FEATURE	RM6N
6 decades	■
Range 10 ohm to 10 Mega ohm	■
Accuracy 1%	■
Low cost	■

The RM6-N is a space saving 6 decade resistance box, 3 models are available covering the range 1 ohm to 111,111 Mega ohm. An additional 1 kilo ohm resistor is available at the terminals enabling the user to make a simple divider. The RM6-N incorporates 0.6 watt resistors with a specified accuracy of $\pm 1\%$. The maximum permissible voltage is 250 V dc. Designed for durability and ease of maintenance, the case is high impact polystyrene and the size is only 190 x 140 x 70 mm. The RM6-N's constitute an ideal tool for use in all electrical and electronic laboratories or workshop environments offering a wide range of values with minimum cost.

RM6N SPECIFICATIONS

Decades	Accuracy	Maximum Current	RM6-N	RM6-N2	RM6-N3
10 x 1 Ω	$\pm 1\%$	250mA		■	
10 x 10 Ω	$\pm 1\%$	250mA	■	■	
10 x 100 Ω	$\pm 1\%$	75mA	■	■	■
10 x 1k Ω	$\pm 1\%$	25mA	■	■	■
10 x 10k Ω	$\pm 1\%$	7.5mA	■	■	■
10 x 100k Ω	$\pm 1\%$	3.5mA	■	■	■
10 x 1M Ω	$\pm 1\%$	0.5mA	■		■
10 x 10M Ω	$\pm 1\%$	0.18mA			■

Dimensions

190mm x 140mm x 70mm (W H D) approx

Mass

0.49kg

Resistors

Metal film 0.6W at 70 °C

Temperature coefficient ± 100 p.p.m. / °C

Switches

Silver plated brass Contact resistance = 10 milli ohm, positive click mechanism. Insulation Resistance >50,000 Mega ohms

Residual Resistance

< 0.01 ohm

Case

High impact polystyrene



RM8

WIDE RANGE, COMPACT & VERSATILE 8 DECADE RESISTANCE BOX WITH DOUBLE POLE SWITCHING

The model RM8 decade resistance box is designed to compliment our range of resistance boxes, offering a very wide range 0.01 ohm to 1 Mega ohm in a compact and versatile unit. The low decade steps of 0.01 ohm enable very high resolution, when simulating resistance values and the power rating is 1.0 watt per coil. The RM8 uses double pole switching to minimize the effects of contact resistance. The lower value decades (0.01 and 0.1 ohm) are manufactured from Manganin resistance wire and the other decades from selected metal film resistors. This offers good stability combined with excellent load and temperature coefficients. Housed in a hardwood case with metal panel the size is only 254 x 145 x 80mm and the connections are with 4mm binding posts that will accept spade or banana plugs.

KEY FEATURE	RM8
8 decades	■
Wide range 0.01 ohm to 1 Mega ohm	■
Accuracy 0.1%	■
Exceptional value for money	■
Compact size	■
Power rating 1W / coil	■

RM8 SPECIFICATIONS

Decades	Accuracy	Maximum Current
10 x 100K Ω	$\pm 0.1\%$	0.003A
10 x 10K Ω	$\pm 0.1\%$	0.01A
10 x 1K Ω	$\pm 0.1\%$	0.033A
10 x 100 Ω	$\pm 0.1\%$	0.1A
10 x 10 Ω	$\pm 0.5\%$	0.3A
10 x 1 Ω	$\pm 1\%$	1.0A
10 x 0.1 Ω	$\pm 5\%$	1.0A
10 x 0.01 Ω	$\pm 10\%$	1.0A

Terminals

2 binding posts will accept 4mm banana plugs and spade tags.
1 terminal for connection to panel/earth

Dimensions

254mm x 145mm x 80mm (W H D) approx

Mass

0.95 kg

Resistors

Power Rating: 1 watt per resistor

Lower decades (0.01 & 0.1 ohm) Manganin wire wound,
other decades metal film

Temperature coefficient: 10ppm/ $^{\circ}$ C

Switches

Rotary 2 poles in parallel, contacts silver plated brass with positive click mechanism. Insulation >50,000 Mega ohm

Residual Resistance

< 0.1 ohm

Test Voltage

1kV dc between terminals and panel



CM5-N

5 DECADE CAPACITANCE COMPENSATION BOX TO COMPLEMENT THE RM6-N

KEY FEATURE	CM5-N
5 decades	■
Range 100 pF to 11.111 uF	■
Accuracy 5%	■
Residual capacitance 30 pF at zero setting	■
Residual capacitance compensation	■

A five decade capacitance box to complement the RM6-N range of resistance decades. Styled in the same ergonomic desk case, the CM5-N is a useful addition to any laboratory, as well as for industrial and educational use. The required capacitance is set by means of rotary switches with skirted knobs and stators giving a clear indication of the dial setting. The capacitors are a combination of polycarbonate and polystyrene, generously rated minimum 160 Vdc with a good dissipation factor and high insulation. A useful feature of this unit is the residual capacitance being compensated for on the 10 x 100pF and 10 x 1nF dials so that the actual value of the dial setting appears at the terminals.

CM5-N SPECIFICATIONS

Dimensions
330mm x 240mm x 200mm (W H D) approx
Mass
6.5kg
Resistors
Metal film 0.6 ohm at 70 °C Temperature coefficient ±100 p.p.m. / °C
Switches
Contact material silver plated brass. Contact resistance = 10 mohm with positive click mechanism. Insulation Resistance = 50,000 Mohm
Resistance
<i>Temperature Co-efficient:</i> ±3ppm / +20°C to +85°C ±5ppm max over -55°C to + 125°C 0.1, 0.01, & 0.001 dials 10ppm/°C
<i>Full Load Stability:</i> ±35ppm/10,000 hours ±50ppm/26,000 hours
<i>No Load Stability:</i> ±25ppm/10,000 hours ±35ppm/26,000 hours Over full temperature range; -50°C to +125°C
<i>Power Rating:</i> 0.33 watt (+85°C) 0.25 watt (+110°C)
<i>Maximum Continuous Working Voltage:</i> Up to 250 V dc
<i>Noise:</i> Essentially non-measurable <1.5 mV/°C
<i>Thermal E.M.F.:</i> <0.4mV/°C typical
<i>Encapsulation:</i> Moulded epoxy
<i>Windings:</i> Exclusive 'air cushioned' technique provides virtually stressless elements for improved performance. Non inductively wound. Direction of winding reversed at half turns point

Decades	Accuracy
10 x 100pF	± 5%
10 x 1nF	± 5%
10 x 10nF	± 5%
10 x 100nF	± 5%
10 x 1mF	± 5%



RS3 SPECIFICATIONS

Model	Value	Uncertainty of Adjustment @20°C	Uncertainty of Certification	Temp Coeff Typical 15 to 20°C	Stability Over 1 Year	Dissipation Max in Air Watts	Dissipation Max in Oil Watts	Max. I in Air (Amps)	Max. I in Oil (Amps)
RS3/0001	0.0001Ω	0.02%	±200ppm	20ppm/°C	0.0025%	1	4	100	200
RS3/001	0.001Ω	0.01%	±50ppm	25ppm/°C	0.0025%	1	4	32	60
RS3/01	0.01Ω	0.01%	±25ppm	10ppm/°C	0.001%	1	4	10	20
RS3/02	0.02Ω	0.01%	±50ppm	10ppm/°C	0.001%	1	4	7	14
RS3/05	0.05Ω	0.01%	±50ppm	10ppm/°C	0.001%	1	4	4.5	9
RS3/0.1	0.0.1Ω	0.003%	±25ppm	10ppm/°C	0.001%	1	4	3	6
RS3/1	1Ω	0.003%	±25ppm	10ppm/°C	0.001%	2	10	1.4	3
RS3/10	10Ω	0.003%	±25ppm	10ppm/°C	0.001%	2	10	0.44	1
RS3/25	25Ω	0.005%	±25ppm	10ppm/°C	0.001%	1	10	0.2	1
RS3/50	50Ω	0.005%	±25ppm	3ppm/°C	0.001%	1	10	0.1	0.3
RS3/100	100Ω	0.003%	±25ppm	3ppm/°C	0.001%	1	10	0.1	0.3
RS3/250	250Ω	0.005%	±25ppm	3ppm/°C	0.001%	1	10	0.1	0.1
RS3/1k	1kΩ	0.003%	±25ppm	3ppm/°C	0.001%	1	10	0.03	0.030
RS3/10k	10kΩ	0.003%	±25ppm	3ppm/°C	0.001%	1	10	0.01	0.03
RS3/100k	100kΩ	0.003%	±25ppm	3ppm/°C	0.001%	1	1	0.003	0.003
RS3/1M	MΩ	0.01%	±25ppm	3ppm/°C	0.002%	1	1	0.0002	0.0002

*Special values can be made to order.

Value in ohms	Typical time constant
1Ω	+ 0.34μH/Ω
10Ω	+ 0.18μH/Ω
100Ω	+ 0.03μH/Ω
1kΩ	+ 0.04μH/Ω
10kΩ	+ 0.6μH/Ω

The resistance standards type RS3 were primarily designed as DC standards, however values above 0.1 ohm are non inductively wound and the adjacent AC characteristics are typical

Dimensions

160mm high x 90mm diameter approx

Mass

0.9kg approx

Resistance Elements

Manganin or Zeranin depending on the value. 100 ohm, 1, 10 and 100 kilo ohm low inductance winding on brass formers with PTFE insulation. 0.1, 1 and 10 ohm bifilar winding on cylindrical brass formers with PTFE insulation. 0.01, 0.001, and 0.0001 ohm resistance material in the form of straight rods or loops supported on 12mm brass conductors

Terminals

Potential — Gold plated copper 4mm
Current — Nickel

Top Panel

Bakelite marked with the value, class designation and serial number

Case

Light alloy, black anodised to give maximum heat radiation
Thermometer Tube: Slotted extending the length of the resistance element

Label

Each standard is fitted with a label that describes its characteristic and operating parameters

CR

HIGH ACCURACY, COST EFFECTIVE 4 TERMINAL CALIBRATION RESISTOR

This range of low cost 4 terminal calibration resistors combine high accuracy, class 0.02, long term stability and permanence of calibration in a compact unit. Constructed using carefully selected low temperature coefficient Manganin or Zeranin wire, depending upon value and mounted to ensure mechanical stability, these resistors will provide a cost effective addition to any laboratory or workshop. Typical applications include calibration reference, accurate current measurement instrument calibration and accurate shunt resistors.



CR SPECIFICATIONS

Model	Resistance Value	Tolerance \pm %	Resistivity material	Max. current in air	Nominal voltage at voltage taps	Storage stability type/year
CR-0.0001	100 $\mu\Omega$	0.1	Manganin® metal sheet	60 A	6 mV	$< 4 \times 10^{-4}$
CR-0.0002	200 $\mu\Omega$	0.05		60 A	12 mV	$< 4 \times 10^{-4}$
CR-0.0005	500 $\mu\Omega$	0.05		60 A	30 mV	$< 4 \times 10^{-4}$
CR-0.001	1 m Ω	0.05	Manganin® metal sheet	30 A	30 mV	$< 5 \times 10^{-5}$
CR-0.002	2 m Ω	0.05		30 A	60 mV	$< 5 \times 10^{-5}$
CR-0.005	5 m Ω	0.05		20 A	100 mV	$< 5 \times 10^{-5}$
CR-0.01	10 m Ω	0.03		14 A	140 mV	$< 5 \times 10^{-5}$
CR-0.02	20 m Ω	0.03		10 A	200 mV	$< 5 \times 10^{-5}$
CR-0.05	50 m Ω	0.03		6 A	300 mV	$< 5 \times 10^{-5}$
CR-0.1	100 m Ω	0.02	Zeranin® - wire	5 A	500 mV	$< 3 \times 10^{-5}$
CR-0.2	200 m Ω	0.02		3 A	600 mV	$< 2 \times 10^{-5}$
CR-0.5	500 m Ω	0.02		2 A	1 V	$< 2 \times 10^{-5}$
CR-1	1 Ω	0.02		1.5 A	1.5 V	$< 1 \times 10^{-5}$
CR-2	2 Ω	0.02		1 A	2 V	$< 2 \times 10^{-5}$
CR-5	5 Ω	0.02		0.7 A	3.5 V	$< 2 \times 10^{-5}$
CR-10	10 Ω	0.02		0.5 A	5 V	$< 1 \times 10^{-5}$
CR-20	20 Ω	0.02		0.35 A	7 V	$< 2 \times 10^{-5}$
CR-50	50 Ω	0.02		0.2 A	10 V	$< 2 \times 10^{-5}$
CR-100	100 Ω	0.02		0.15 A	15 V	$< 1 \times 10^{-5}$
CR-200	200 Ω	0.02	Zeranin® - wire	0.1 A	20 V	$< 2 \times 10^{-5}$
CR-500	500 Ω	0.02		70 mA	35 V	$< 2 \times 10^{-5}$
CR-1 k	1 k Ω	0.02		45 mA	45 V	$< 1 \times 10^{-5}$
CR-2 k	2 k Ω	0.02		20 mA	40 V	$< 2 \times 10^{-5}$
CR-5 k	5 k Ω	0.02	Zeranin® - wire	14 mA	70 V	$< 2 \times 10^{-5}$
CR-10 k	10 k Ω	0.02		10 mA	100 V	$< 1 \times 10^{-5}$
CR-20 k	20 k Ω	0.02		7 mA	140 V	$< 2 \times 10^{-5}$
CR-50 k	50 k Ω	0.02		4 mA	200 V	$< 3 \times 10^{-5}$
CR-100 k	100 k Ω	0.02		3 mA	300 V	$< 3 \times 10^{-5}$

KEY FEATURE

Low capacitance and low inductance design

High accuracy 0.02%

Suitable for direct current & technical frequencies

Oil-filled design ensures great long-term stability $< \pm 0.01\%$ over many years

CR

■

■

■

■

Dimensions

38mm x 97mm x 41mm (61mm with terminals - approx)

Mass

250g approx

Four great brands. One great reputation.

The Seaward Group is made up of four individual brands specialising in different aspects of electrical safety testing. Each is passionately dedicated to providing technologically advanced solutions to the highest possible standards within highly specific markets.

A Total Solutions way of thinking

Each brand focuses on the total package that will make the testing or measurement process quicker and easier for customers. It's not just about the products we sell, but the service as a whole. We think integration, after sales care, calibration and training courses are just as important as the Testers themselves.



Portable Electrical Safety Instruments

Providing Testers, software and services for appliance testing, fixed installation testing and high voltage testing.



Industrial Safety Instruments

Clare is the market leader in the design and manufacture of test equipment for in-line production and manufacturing conformance.



Precision Instruments

Cropico, the newest addition to the Seaward Group, has over 50 years experience in the development of precision measurement solutions, specialising in advanced resistance measurement instruments.



Biomedical Safety Testing

Rigel Medical is at the forefront of electronic biomedical test and measurement equipment, software and accessories.

A world leading group of companies

At the Seaward Group we believe our reputation for product innovation and technical expertise is second to none and reflects our in-depth knowledge and understanding of all the markets in which we operate.

Your Local Distributor

Cropico, Bracken Hill, South West Industrial Estate,
Peterlee, County Durham, SR8 2SW United Kingdom

Tel: +44 (0) 191 586 3511 **Fax:** +44 (0) 191 586 0227

Email: sales@cropico.com **Web:** www.cropico.com

USA Telephone Enquiries: +001 (813) 886 2775



Seaward, Clare, Rigel Medical,
Cropico, Clare Instruments U.S. Inc
are all part of the Seaward Group